



KEY FEATURES


- 26, 24 and 22 Tru-Gauge™ and .032" and .040" Aluminum *
- 1/2:12 to 3:12 minimum pitch recommended when installed with butyl sealant (*please inquire for specific pitch recommendations for each profile*)
- Factory-notched and tabbed panels available
- Long length flashings available up to 20' 10"
- Concealed fasteners: fasteners cannot leak
- Onsite roll-forming available (*inquire*)
- Panel options: Striations, Accent Ribs, Flat Pan (*varies by panel, inquire*)
- OverEzee retro-fit systems available

TESTING


-  ICC EVALUATION SERVICE™ ICC-ESR #5045 & #5046 with CBC-CRC Supplement *
 -  Code compliance UL Evaluation Report UL ER #25913-01. UL 580 Class 90 - Wind Uplift
 - UL 790 Class A (ASTM E108) - Fire rated
 - UL 2218 Class 4 - Impact (hail) rated
 - ASTM E1680 - Air infiltration (roof)
 - ASTM E1646 - Water infiltration (roof)
 - ASTM E1592 - Negative structural uniform static air pressure *
 - ASTM E330 - Positive structural uniform static air pressure *
 - ASTM E331 - Water infiltration (wall)
 - ASTM E283 - Air infiltration (wall)
 - ASTM A653/A924 - G90 Galvanized
 - ASTM A792 - Zincalume/Galvalume AZ-50/55
 - ASTM B209 - Aluminum Substrate
- * Contact salesman for list of conforming panels

Mechanical Seam Panel Profiles


MS-100™



MS-150™



MS-200™




Snap Lock Panel Profiles


Versa-Span™




Easy-Lock™




Clip-Lock™



Slim-Lock™



T-Panel™



Premier-Lock™



StreamLine™




MATERIAL SPECIFICATIONS

- 24 Tru-Gauge™ Kynar 500® Painted Steel
- ▲ 22 Tru-Gauge™ Kynar 500® Painted Steel
- ◆ .032" Kynar 500® Painted Aluminum
- 24 Tru-Gauge™ G-90 Galvanized or AZ-50
- 24 and 22 Tru-Gauge™ bare Zinalume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- G-90 Galvanized or AZ-50
- .040" Kynar 500® Painted Aluminum (please inquire)
- 24 Tru-Gauge™ Bonderized
- 22 gauge Rusteel Plus™ (A606)
- Custom 20 & 18 Tru-Gauge™ and .050" and .063" Aluminum (please inquire)
- 16 OZ & 20 OZ Real Copper
- Kynar 500® and substrate testing data available
(See website)

FINISHES


- 21 Standard Colors, 5 Metallic Colors and 4 Specialized Colors
- Kynar 500® Paint System - the ultimate in exterior durability and color retention
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat, 70% resin finish, applied at a 1 mil. thickness
- 40 year residential paint warranty
- 20 and 30 year commercial paint warranty: Contact TMP for warranty specifications
- “Oil Canning” is an inherent characteristic of roof and wall products, and not a defect, which is not a cause for panel rejection

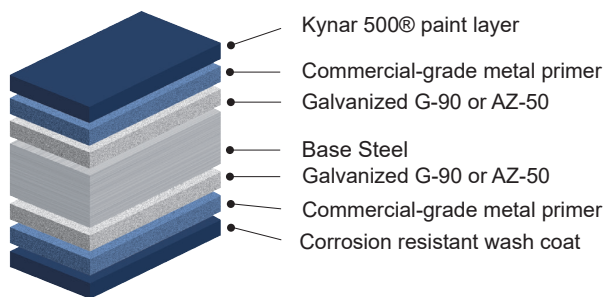


STANDARD COOL KYNAR 500® COLORS

▲ 22 Tru-Gauge™


◆ .032 Aluminum

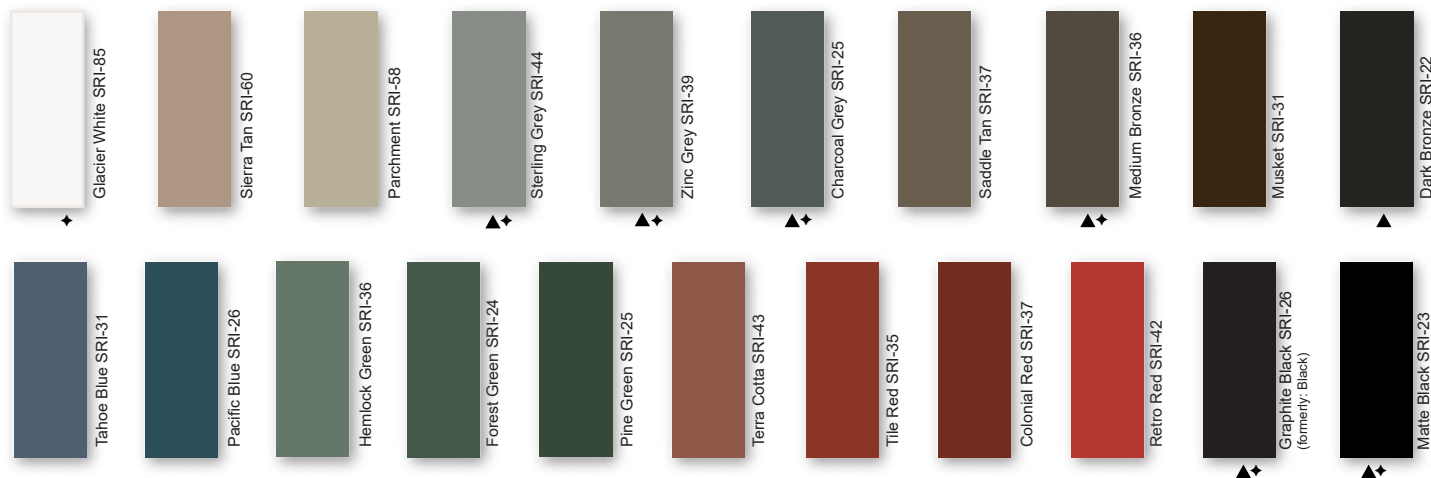

PREMIUM METALLIC COOL KYNAR® COLORS

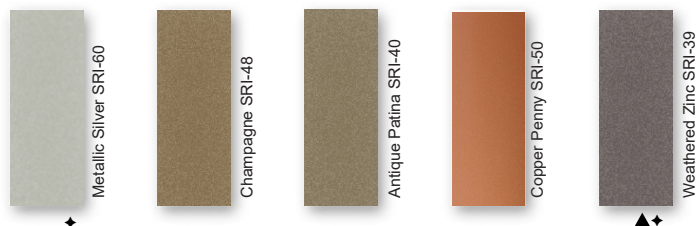

SPECIALIZED MATERIAL

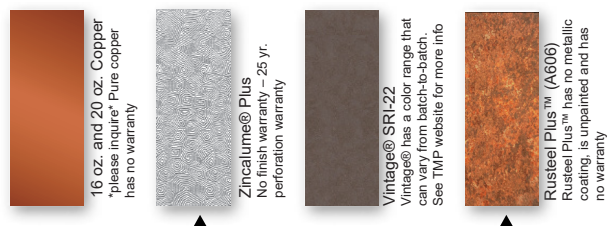

These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen.
SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E 1980 and
are based on actual testing.***Oil canning is not a cause for material rejection***



Rev. Date 02-25